

# CMBS036 | DATASHEET

## 45° beam splitter with mount for 61.0 mm claming diameter optics



### KEY ADVANTAGES

**Ready to use** and easy to setup.

**Ideal to create coaxial illumination solutions.**

**50% transmission and 50% reflection.**

**Easy and secure clamping system.**

**Compatible** with telecentric lenses and illuminators.

**CMBS series** is a collection of 50/50 plate beam splitter modules designed to create highly efficient coaxial illumination solutions with Opto Engineering® telecentric lenses and collimated illuminators.



### SPECIFICATIONS

#### Optical specifications


Front coating	Beam splitter 50/50 @ 45°, bandwidth 430-670 nm	
Back coating	Normal reflectance <0.5%, bandwidth 430-670 nm	
Clear aperture	(mm)	53
Deviation angle	(°)	90
Working distance difference <sup>1</sup>	(mm)	83.4

#### Mechanical specifications

Clamping size	(mm)	61.0
Clamping system	lockring	
Length	(mm)	103.4
Width	(mm)	88.0
Height	(mm)	103.3
Mass	(g)	915

<sup>1</sup> Value to be subctrated from the objective or illuminator working distance when the CMBS is used

### CMBS SETUP

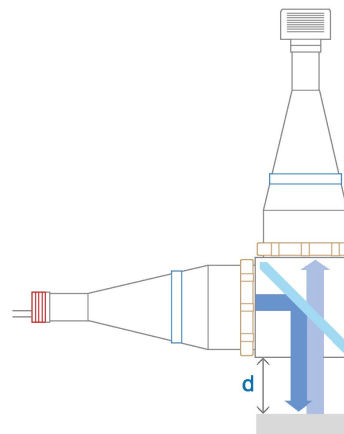

### COMPATIBLE PRODUCTS

Full list of compatible products available [here](#).



A wide selection of innovative machine vision components.

All product specifications and data are subject to change without notice to improve reliability, functionality, design or other. Photos and pictures are for illustration purposes only. Data are reported by design, actual lens performance may vary due to manufacturing tolerances.