

**OEVIS®** is a cutting-edge environment for rapidly developing machine vision applications without the need for programming. It is tailored for system integrators, machine vision specialists and automation engineers who seek a versatile and user-friendly vision software solution.



### KEY ADVANTAGES

- **Ease of Use**  
Intuitive, flowchart-based development with no programming required
- **All-in-One**  
Develop and execute with the same license. Effortlessly configure any Genicam camera.
- **Easy integration**  
Supports diverse hardware and communication protocols
- **Comprehensive Support**  
Access extensive resources, example programs, support and training
- **Advanced Capabilities**  
Handle complex inspections with multiple cameras and multi-threading



**30-DAY FREE DEMO LICENSE**

CONTACT US



### FUNCTIONALITIES

#### FLOW-BASED PROGRAMMING



Fast-use, intuitive graphical development method with automatic linking of computer vision and logic tools.

#### MACRO, LOOPS & CONDITIONS



Create complex programs, including loops, conditions and subprograms without writing any code.

#### DEBUGGING



Run one single tool at a time for troubleshooting or checking whether the program is correct or not.

#### EASY FACTORY INTEGRATION



Support a variety of communication protocols used in factory automation such as Modbus, Ethernet/IP, OPCUA and many more.

#### MULTITHREADING ADD-ON



Parallel execution of algorithms and analysis cycles. Synchronous or asynchronous acquisition from multiple cameras and simultaneous image processing.

#### HMI DESIGN




Easily create beautiful and customized user interfaces within the same application software used to create your vision project.

#### CUSTOM C# CODE



Insert C# code inside the job to implement custom operation, logic and data manipulation.

#### REST API




Seamless communication with web services, remote and local servers.

# WIDE SELECTION OF TOOLS FOR COMPUTER VISION


## IMAGE PROCESSING, SEGMENTATION AND DEFECT DETECTION



OEVIS® features many algorithms for surface and completeness inspection, including blob analysis, erosion, dilation, opening and closing, segmentation tools, standard, relative, dynamic, color thresholding, image unwrapping and many more.



Identification of machining debris within holes through blob extraction.



Completeness inspection of PCBs via thresholding and morphological algorithms.


## TEMPLATE MATCHING



OEVIS® matching algorithms robustly and accurately identify objects even under challenging conditions such as rotation, local deformation, varying textures, and changes in scale.



Identify objects based on template matching algorithms.



Template matching to identify food can position and rotation.


## CALIBRATION, CORRECTION OF DISTORTION, ROBOT GUIDANCE



OEVIS® high-performance algorithms for distortion correction meet the requirements of telecentric optics, eliminating perspective distortion. Furthermore, OEVIS® integrates precise hand-eye calibration algorithms for vision-guided robotic applications, such as pick-and-place.



Distortion correction for telecentric optics.



Calibration for robot guidance.


## 1D -2D EDGE DETECTION AND METROLOGY



OEVIS® efficiently finds edges using many different algorithms and contour analysis techniques. OEVIS® state-of-the art algorithms measure with subpixel accuracy diameters, lengths, concentricity, radiuses, and angles of complex parts.



High precision measurement of complex parts.



Edge detection and extraction of profile data from threads.

## BARCODE, QR-CODE AND 2D DATACODE READING



OEVIS® advanced algorithms ensure high-speed and accurate reading of all common barcodes and a wide range of Data codes, including Data Matrix ECC200, QR, PDF417, Aztec and many others.



Barcode reading on packaging.



Datamatrix reading on pharmaceutical products.

## OPTICAL CHARACTER RECOGNITION/VERIFICATION (OCR/OCV)



OEVIS® employs high-performance algorithms to localize characters, irrespective of their orientation or font type. Recognition accuracy is further improved with data augmentation functionalities. Moreover, many pre-trained fonts are available.



Read characters on printed paper.



Read dot prints on complex background.

## POLARIZATION ANALYSIS



OEVIS® features many algorithms to analyze images acquired with polarized cameras, including AoLP/DoLP mapping, simulation of polarization states and so on.



False-color image in HSV space showing the angle of polarization of plastic parts.



0°, 45°, 90° and 135° angle of polarization of plastic parts.

## DATA CLASSIFICATION & MACHINE LEARNING



OEVIS® features machine learning models (MLP, SVM, KNN) and clustering functions (KMeans, DBSCAN) for complex image analysis tasks such as distinguishing between different textures or cluster objects with irregular shapes.



Parts classified based on their proximity to labeled examples.



Visualization of a typical data clustering distribution.

# SIMPLIFIED WORKFLOW

OEVIS® is conveniently organized into four sections that guide you in the development of your vision application.

## 1 - SYSTEM



- Connect & configure third-party automation hardware via multiple supported communication protocols.
- Manage multiple users access with specific permissions.

Wide range of supported standards, communication protocols and hardware.

- Profinet<sup>1</sup>
- Ethercat<sup>1</sup>
- Ethernet/IP<sup>1</sup>
- Modbus TCP<sup>1</sup>
- ADAM Advantech I/O


- Modbus Client TCP / RTU<sup>2</sup>
- Modbus Server TCP / RTU<sup>2</sup>
- OPC UA
- Serial RS232/RS485
- TCP/IP

- Advantech PC
- AdLink PC
- IMAGO Technologies PC
- Neosys PC

<sup>1</sup> via CIFX Hilscher cards    <sup>2</sup> native support

CAN'T FIND YOUR HARDWARE?  
CONTACT US.

## 2 - ACQUIRE



- Acquire from multiple cameras.
- Preview the live streaming images.
- Directly set all the GenICam parameters of each connected device.

Supports any GenICam GenTL camera.


GEN<I>CAM



## 3 - JOB



- Create your vision project using various tools.
- Design from scratch a beautiful front end.
- All the windows can be conveniently moved according to the user preferences.

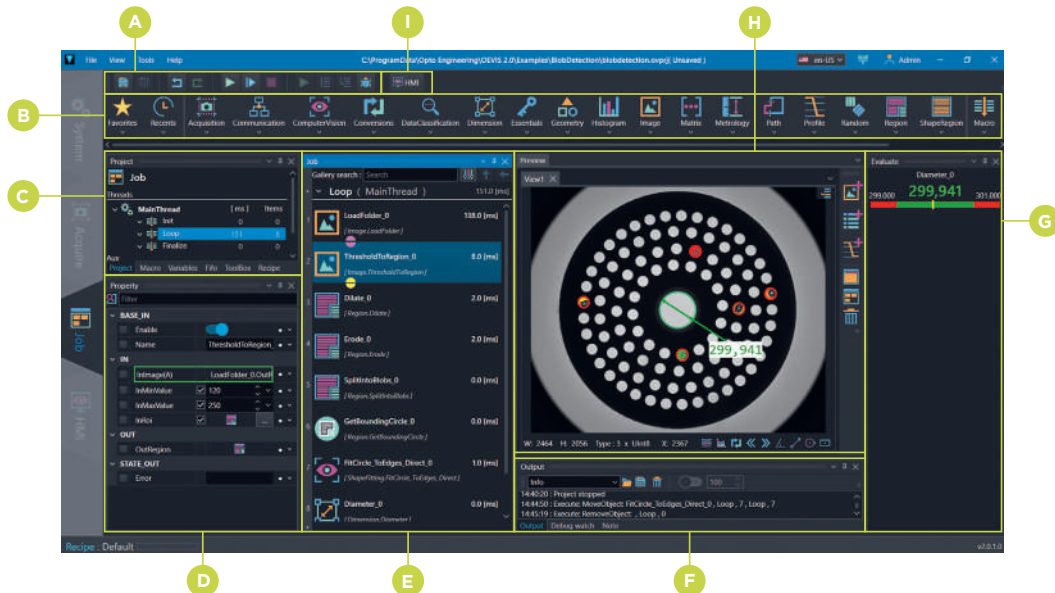

### A EXECUTION PANEL

Save, run in a loop or once, stop and debug your project. Select whether to run only the main thread or multiple threads simultaneously.

### D PROPERTY INSPECTOR

Display and set all the tools properties, including name, input & output values. Parameters followed by the "(A)" symbol automatically link to the first compatible value in the execution flow (if existing).

### G EVALUATE

Visually display dimensional values or any other numerical property to quickly verify if it falls within a predefined range.

### B JOB TOOL BAR

Tools are the bricks of an OEVIS® project. Each tool is composed by an action that is performed when the tool is run and a list of properties that customize its behavior.

### E JOB PANEL & SEARCH BAR

This panel shows the list of selected tools. The connection between tools is shown by half-circles located at the top (inputs) or at the bottom (outputs) of each tool. Different colors identify connections between different tools.

### H VISUALIZER

Preview the results of image analysis and display edges or other properties via drag & drop functionality from the property panel. Add multiple views, display data tables and much more.

### C PROJECT EXPLORER

View Project parts (init, loop and finalize), manage Macros, create global Variables and Fifo queues, view and search tools and create Recipes, where you can save values to be published on the HMI.


### F DEBUG TOOLBOX

Display the event log, keep track of the property value of the selected tools when the program is running and test the connection to a Modbus server.

### I HMI DESIGN

Design and customize your application's front end with a built-in advanced graphic editor.

Click on the HMI button to activate several controls to design your application's front end interface.

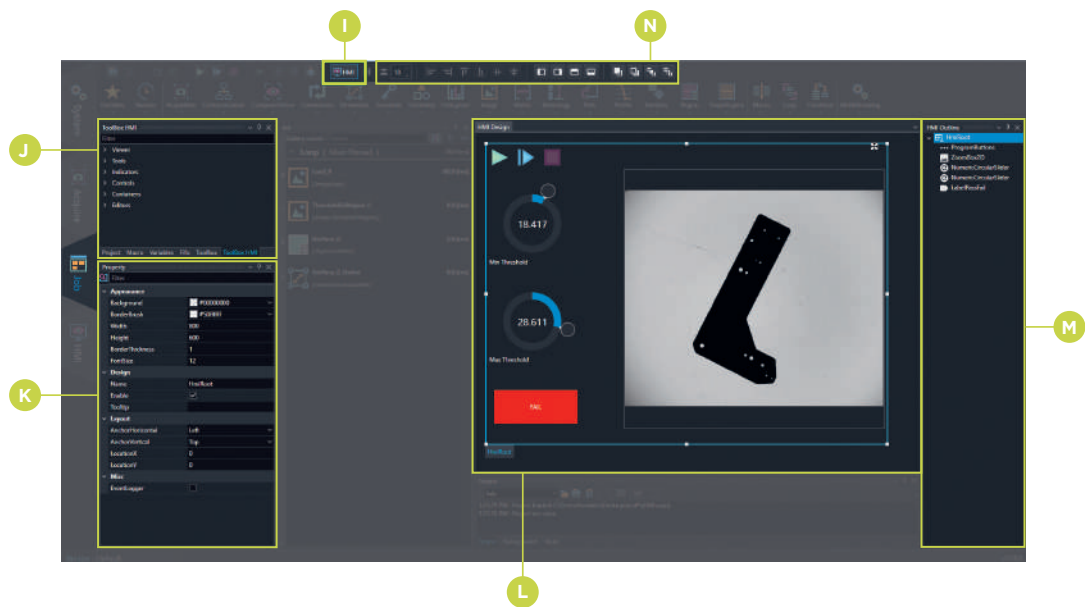

- J HMI TOOL BOX**

Add a wide variety of items including charts, visual indicators of any type, toggle switches, control buttons, text and your logo. Simply drag & drop them onto the HMI canvas.
- K HMI PROPERTY AND LINKING**


Deeply customize the HMI by editing the layout, appearance and behavior of the controls. To link the property of a tool to an HMI control, simply select the control, highlight the tool that you want to link and drag the tool's property onto the control label.
- L HMI DESIGN CANVAS**

The design canvas is where all control items are displayed. You can resize, move or transfer into different containers any item by dragging it with the mouse.
- M HMI OUTLINE**


View all the HMI items that you have added displayed in a tree and organized according to their hierarchy.
- N HMI TOOL BAR**

Quickly edit the layout of controls including alignment, spacing, order of appearance and easily dock the selected control to the left/right/top/bottom/ side of its parent container.


4 - HMI EXECUTION



Results of the processing are displayed to the end user in beautiful and intuitive front ends.



The 'DEFECT INSPECTION OF MACHINED PARTS' HMI interface displays a circular image of a machined part with numerous yellow dots indicating defects. It includes a 'Camera 1' status indicator, a 'Zoom' slider, and a 'Frame ID' field.

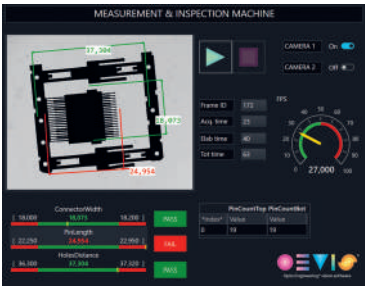


The 'MEASUREMENT & INSPECTION MACHINE' HMI interface displays a rectangular image of a machine component with green and red measurement lines. It includes a 'Camera 1' status indicator, a 'Frame ID' field, and a 'Zoom' slider.

MACHINE VISION LIBRARIES

Opto Engineering® graphical environments are powerful, flexible, easy to use, and are designed to quickly develop and run new vision applications without the need to write program code.

**TCLIB Suite**


Software library & stand-alone tools for the optimization of telecentric setups

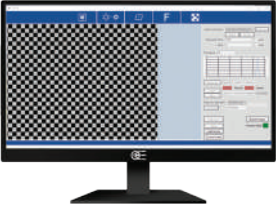

- State-of-the-art algorithms for distortion calibration.
- Ensure the best focus and alignment with fast and intuitive stand-alone tools to achieve the best measurement results.

**360LIB Suite**

Software library & stand-alone tools for the optimization of 360° optics setups



- State-of-the-art algorithms for unwrapping and correction of decentering.
- Achieve the best results for OCR/OCV/barcode reading with 360° view optics.