

UNIT IN MM
 UNLESS OTHERWISE SPECIFIED
 ASSY LENGTH TOLERANCE
 < 150mm = ±10
 ≥ 150mm and < 250mm = ±15
 ≥ 250mm and < 500mm = ±20
 ≥ 500mm and < 1000mm = ±30
 ≥ 1000mm and < 5000mm = ±50
 5000mm and above = ±100


This document is the property of Alysium-Tech. It must not be copied or otherwise disclosed without prior written consent

RoHS COMPLIANT

BILL OF MATERIALS

| Item | Description |
|------|---|
| 1 | Series 60 Circular 6 Pin Male Moulded Connector 60-00-0106 IO Moulded (Au) <BLK> |
| 2 | MCD-679, [OD=4.9mm] <BLK> UL20276 6C#26(7/0.16) |
| 3 | Series 60 Circular 6 Pin Female Moulded Connector 60-01-0106 IO Moulded (Au) <BLK> |
| 4 | Cable Label |
| 5 | Heat Sealed PE Bag |
| 6 | Label on Bag (ALY CE) |

WIRING DIAGRAM

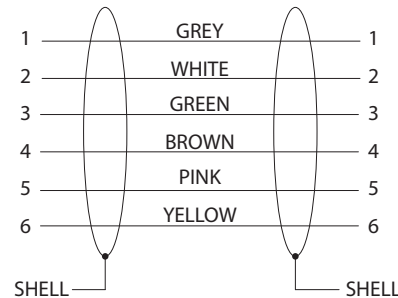

PACKAGING DETAIL

