


CMMR4K090-L | DATASHEET

OPTO ENGINEERING

45° first surface mirror for 114.0 x 38.5 mm clamping diameter optics, right angle lateral bend

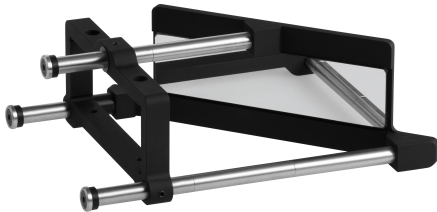

KEY ADVANTAGES

Reflect light at 90°.

Ideal for **limited space**.

Easy and secure clamping system.

Compatible with telecentric lenses and illuminators.

Optional **protective windows** available.



SPECIFICATIONS

Optical specifications

Coating	Aluminium reflective coating, R>90%, bandwidth 430-670 nm	
Deviation angle	(°)	90

Mechanical specifications


Clamping size	(mm)	114.0 x 38.5
Clamping system	mounting screws	
Working distance difference ¹	(mm)	126.3
Length	(mm)	214.0
Width	(mm)	150.1
Height	(mm)	72.0
Mass	(g)	565

Protective windows²

¹ Value to be subtracted from the objective or illuminator working distance when the CMBS is used

² To be ordered separately

CMMR SETUP

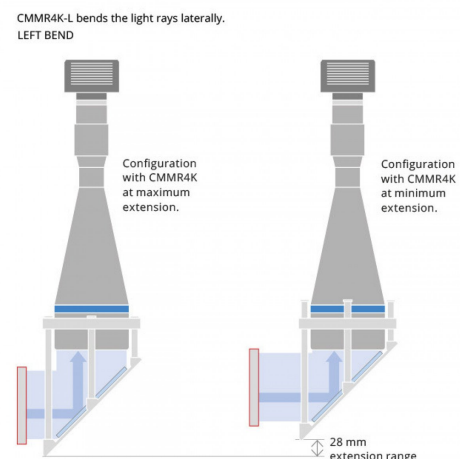

COMPATIBLE PRODUCTS

Full list of compatible products available [here](#).



A wide selection of innovative machine vision components.

All product specifications and data are subject to change without notice to improve reliability, functionality, design or other. Photos and pictures are for illustration purposes only. Data are reported by design, actual lens performance may vary due to manufacturing tolerances.