



EN10MPL1620 | DATASHEET

10 Megapixel high resolution fixed focal lens for 1" sensors, focal length 16 mm, f/N 2.0 - 22, C-mount



KEY ADVANTAGES

Designed for the new high resolution Sony Pregius sensors
Suitable with the Sony Pregius 12mp IMX304 and IMX253 sensors with 1.1" format, and the new Sony Pregius 7.1mp IMX420 and IMX428 with 1.1" format.

High quality / price ratio
High performance with reasonable cost.

Low distortion
Even down to 0.14 %.

EN10MP Series is a series of powerful fixed focal length lenses designed for the high sensitivity and precise high-speed imaging of the new 1.1" and 4/3" Sony Pregius sensors.

RT - Third party product selected by Opto Engineering®.
All technical specifications are provided as declared by the original manufacturer.

SPECIFICATIONS

Optical specifications

| | | |
|---------------------------------|------|-----------|
| Focal length | (mm) | 16 |
| Magnification ¹ | (x) | 0.132 |
| Image circle | (mm) | 23.0 |
| Max sensor size | | 4/3" |
| WD range ² | (m) | 0.1 - inf |
| f/N | | 2.0 - 22 |
| Back focal length | (mm) | 21.00 |
| Distortion on 2/3" ³ | (%) | 1.06 |
| Distortion on 1" ³ | (%) | 1.92 |
| Distortion on 4/3" ³ | (%) | 2.81 |
| Iris control | | Manual |
| Focus Control | | Manual |

Mechanical specifications

| | | |
|---------------------|------|------------|
| Mount | | C |
| Filter thread | | M58 x 0.75 |
| Length ⁴ | (mm) | 85.9 |
| Outer Diameter | (mm) | 60.0 |
| Mass | (g) | 338 |
| Set screw thread | | M2 |

Environment

| | | |
|-----------------------------|------|--------|
| Operating temperature range | (°C) | -10+50 |
|-----------------------------|------|--------|

ANGLE OF VIEW

| Sensors | Diagonal (°) |
|------------------------------|--------------|
| 2/3" (8.5 x 7.1 mm x mm) | 38.3 |
| 1" (12.44 x 9.83 mm x mm) | 54.0 |
| 4/3" (18.93 x 10.61 mm x mm) | 72.9 |

FIELD OF VIEW AT MINIMUM WORKING DISTANCE

| Sensors | (mm x mm) |
|------------------------------|----------------|
| 2/3" (8.5 x 7.1 mm x mm) | 64.39 x 53.71 |
| 1" (12.44 x 9.83 mm x mm) | 94.24 x 74.47 |
| 4/3" (18.93 x 10.61 mm x mm) | 143.41 x 80.38 |

- ¹ Calculated at minimum working distance
- ² Working distance: distance between the front end of the mechanics and the object
- ³ Value calculated at the corner point of the sensor diagonal. For distortion graphs see below
- ⁴ Measured from the front end of the mechanics to the camera flange at infinite focusing

COMPATIBLE PRODUCTS


Full list of compatible products available [here](#).




A wide selection of innovative machine vision components.

All product specifications and data are subject to change without notice to improve reliability, functionality, design or other. Photos and pictures are for illustration purposes only. Data are reported by design, actual lens performance may vary due to manufacturing tolerances.


DATA AT INFINITE WORKING DISTANCE

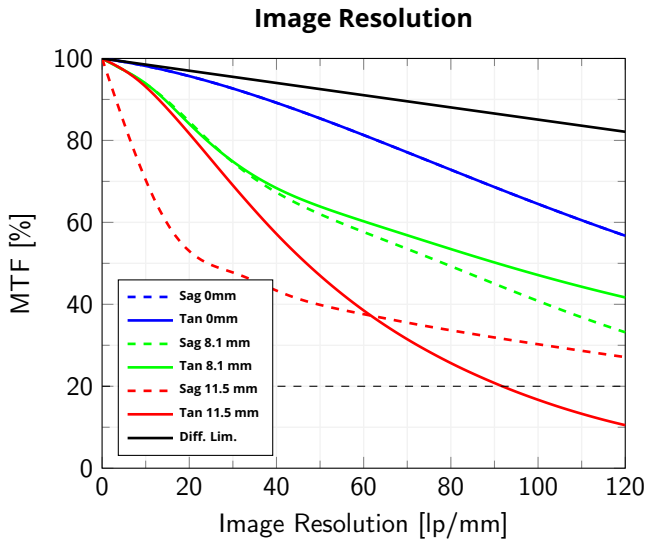

Modulation Transfer Function (MTF) vs. Image Resolution, wavelength range 486 nm - 656 nm, at infinite working distance and maximum aperture

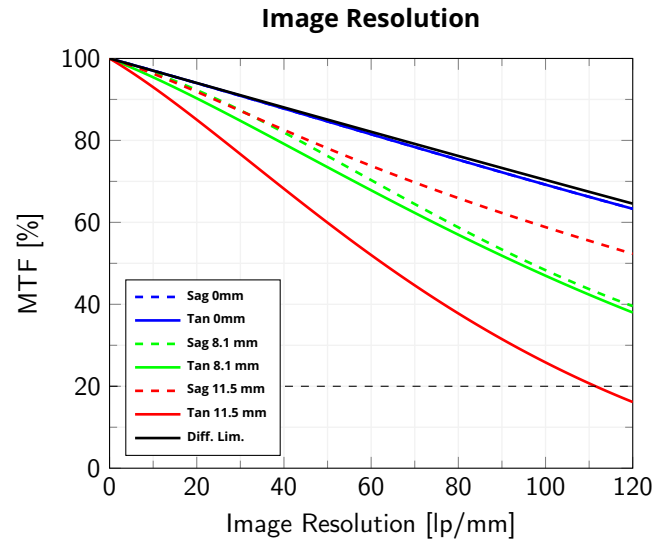

Modulation Transfer Function (MTF) vs. Image Resolution, wavelength range 486 nm - 656 nm, at infinite working distance at $f/4$

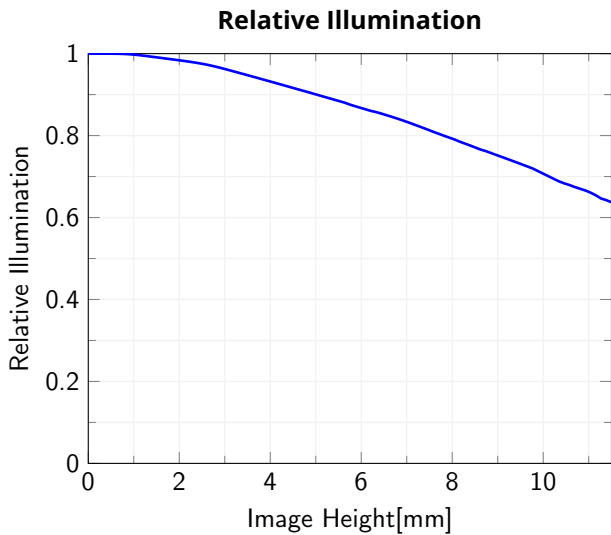

Relative illumination vs. Image Field Height, from the optical axis to the maximum image height at maximum aperture


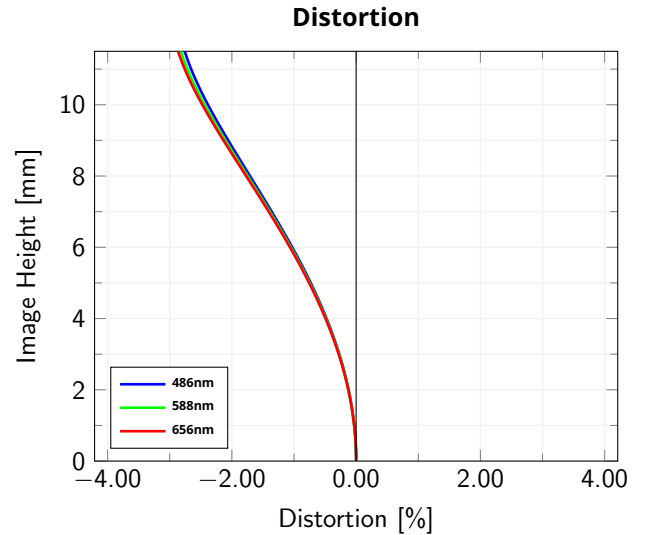



Image Field Height vs. Distortion, from the optical axis to the maximum image height

All product specifications and data are subject to change without notice to improve reliability, functionality, design or other. Photos and pictures are for illustration purposes only. Data are reported by design, actual lens performance may vary due to manufacturing tolerances.


DATA AT MINIMUM WORKING DISTANCE

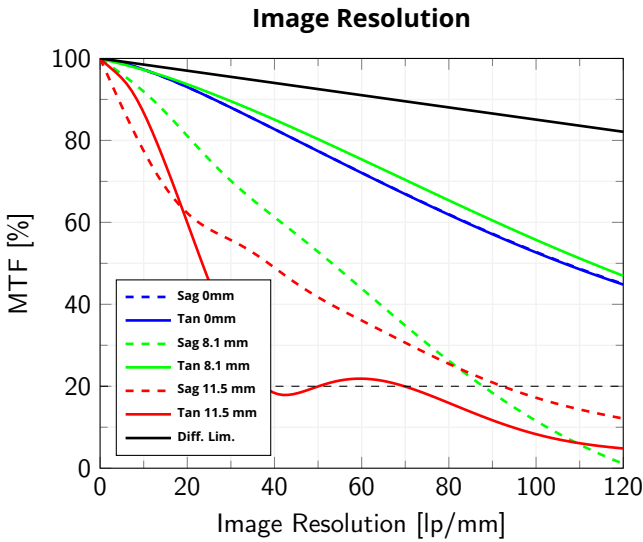


Modulation Transfer Function (MTF) vs. Image Resolution, wavelength range 486 nm - 656 nm, at minimum working distance and maximum aperture

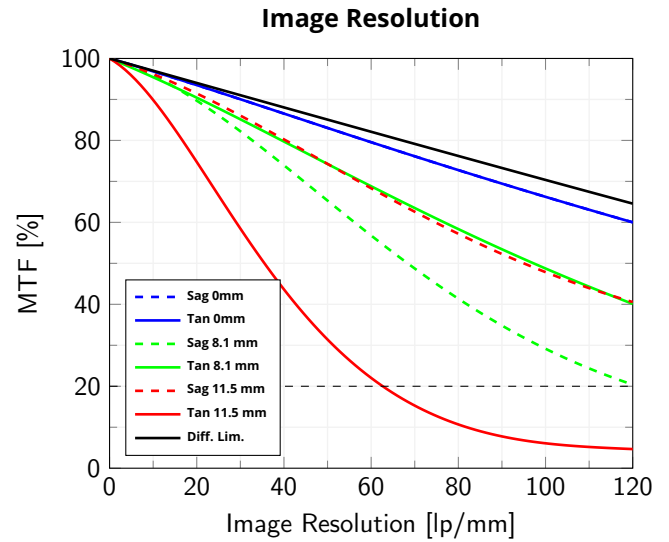

Modulation Transfer Function (MTF) vs. Image Resolution, wavelength range 486 nm - 656 nm, at minimum working distance at $f/4$

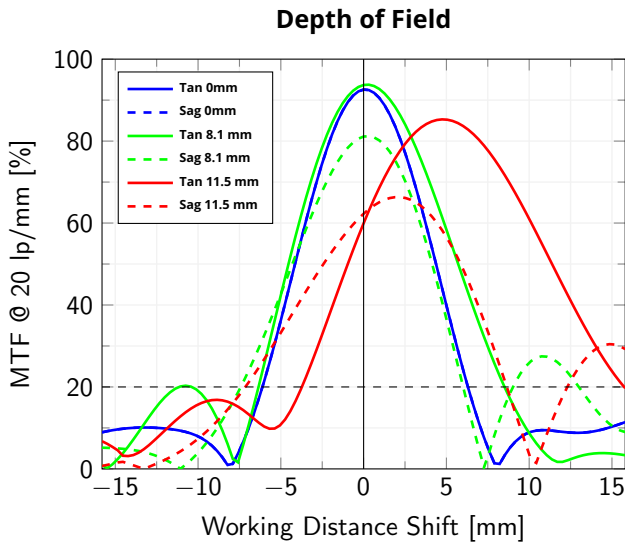

Modulation Transfer Function (MTF) @ 20 lp/mm vs. Working Distance Shift from the best focus at minimum working distance, wavelength range 486 nm - 656 nm, maximum aperture

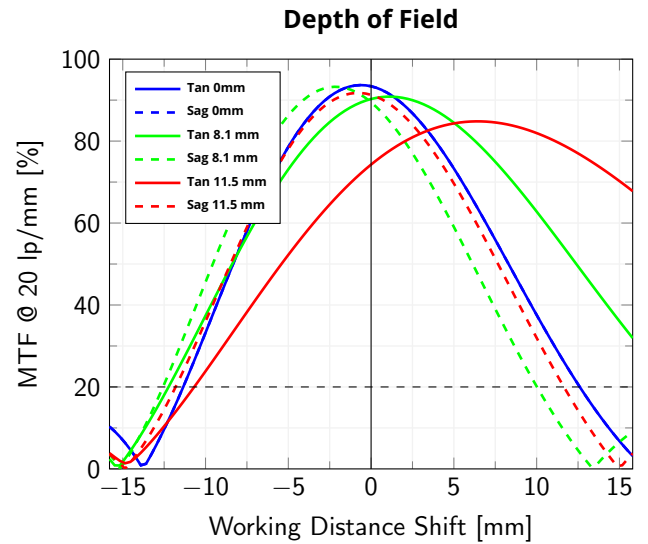

Modulation Transfer Function (MTF) @ 20 lp/mm vs. Working Distance Shift from the best focus at minimum working distance, wavelength range 486 nm - 656 nm, $f/4$

All product specifications and data are subject to change without notice to improve reliability, functionality, design or other. Photos and pictures are for illustration purposes only. Data are reported by design, actual lens performance may vary due to manufacturing tolerances.