

# LTBC114114-G | DATASHEET

## Continuous LED backlight, 114.5 x 114.5 mm illumination area, green, 525 nm



## **KEY ADVANTAGES**

## **Cost-effective homogeneous illumination**

Densely packed LED arrays with matt diffuser eliminating hot spots and glare.

## **Robust industrial Design**

M8 connector for easy connection to power supplies.

#### **Easy integration**

M6 nut channels for easy mounting.

**LTBC series** are LED backlights designed to be employed in a wide variety of applications such as shape and size inspection of workpieces.









## **SPECIFICATIONS**

## **Lighting specifications**

Illumination area width	(mm)	114.5
Illumination area height	(mm)	114.5
Light color, peak wavelength		green, 525 nm
Illuminance <sup>1</sup>	(lux)	15500

## **Electrical specifications**

Supply voltage <sup>2</sup>	(V)	24
Current	(mA)	216
Power consumption	(W)	5.2
Max pulse voltage <sup>3</sup>	(V)	24-48 (36 recomended)
Max pulse current <sup>4</sup>	(mA)	648
Max duty cycle	(%)	10
Max pulse duration	(ms)	10
Connector		M8
Cables		Included

## **Mechanical specifications**

Length	(mm)	159.0	
Width	(mm)	159.0	
Height	(mm)	35.6	
Mass	(g)	810	

- $^{1}$   $\pm 15\%$  at 20mm working distance
- $^{\mathbf{2}}$  Tolerance  $\pm 2\%$
- Constant voltage power supply
- <sup>4</sup> Constant current power supply


#### **Environment**

Operating temperature	(°C)	0-45
Operating relative humidity	(%)	20-85, non condensing

#### **Eye safety**

Dick group (CELEN 62471-2010)	Evernt
Risk group (CEI EN 62471:2010)	Exempt

## **CONNECTOR PINOUT**



Device s

— LED	LED
ide	LED -

Function	Cable color
LED +	Brown
LED +	White
LED -	Blue
LED -	Black


## **COMPATIBLE PRODUCTS**

## Full list of compatible products available here.



A wide selection of innovative machine vision components.



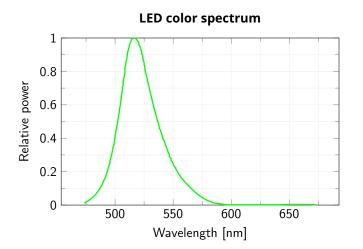

## **BRIGHTNESS DISTRIBUTION**

