


ILLUMINATOR DATA

LT3PVZL80X400-00-X-G-24V

Lighting Dimension

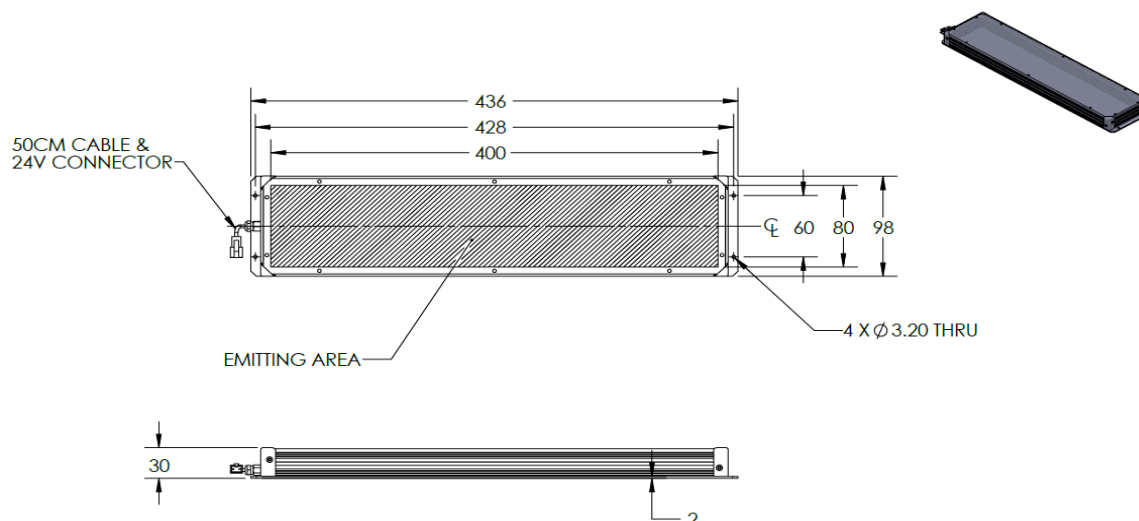

Mechanical Information

Casing Material	Aluminium
Storage Temperature Range	0 - 45°C
Storage Humidity Range	20 - 85%
Weight	852g
Length / Outer Diameter	436mm
Width / Inner Diameter	98mm
Thickness / Height	30mm

ILLUMINATOR DATA

LT3PVZL80X400-00-X-G-24V

Lighting Information																														
Part Number	LT3PVZL80X400-00-X-G-24V																													
LED Color	GREEN																													
Wavelength	525																													
Working Distance	10			20			30																							
Intensity (±15%)	*FOR FURTHER INFORMATION PLEASE CONTACT US																													
Illumination (number of row)	X																													
Illumination Active Area	Active Length / Outer Dia.						400																							
	Active Width / Inner Dia.						80																							
Emission angle	0																													
Eye Safety Class (IEC62471)	EXEMPT																													
Chromaticity Table																														
For White colour only																														
	<table><tr><td>X</td><td>0.296</td><td>0.287</td><td>0.307</td><td>0.311</td></tr><tr><td>Y</td><td>0.276</td><td>0.295</td><td>0.315</td><td>0.294</td></tr></table>					X	0.296	0.287	0.307	0.311	Y	0.276	0.295	0.315	0.294	<table><tr><td>X</td><td>0.311</td><td>0.307</td><td>0.33</td><td>0.33</td></tr><tr><td>Y</td><td>0.294</td><td>0.315</td><td>0.339</td><td>0.318</td></tr></table>					X	0.311	0.307	0.33	0.33	Y	0.294	0.315	0.339	0.318
X	0.296	0.287	0.307	0.311																										
Y	0.276	0.295	0.315	0.294																										
X	0.311	0.307	0.33	0.33																										
Y	0.294	0.315	0.339	0.318																										

Electrical Information	
Rated Constant Voltage	24V±2%
Rated Constant Current	900mA
Power Consumption	21.6W
Casing temperature, After 60 minutes operation	50.6


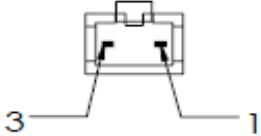
Strobe Mode Specification	
*Normal Strobe Voltage	24 V
*Normal Strobe Current	900mA
Overdrive Voltage Range	Min: 36V Max: 48V
Overdrive Current Range	Min: 2025mA Max: 2700mA
Recommended Overdrive Voltage	36V
**Max. Trigger Pulse Duration	10 msec
**Max. Duty Cycle	10%

*Normal strobe means the lighting is operated using the rated power. Overdrive means the power supplied to the lighting exceeded the rated power.

**Overdrive condition must not exceed the max. trigger pulse duration and max. duty cycle.

ILLUMINATOR DATA

LT3PVZL80X400-00-X-G-24V

Connection Information			
Connector Type (Default)	JST SMR-03V		
Cable Length	50 cm		
Pin Configuration 	Pin	Signal	Cable Colour
	1	LED +	Red
	2	N.C	-
	3	LED -	White
			

Additional Information	
Additional Cooling Method	Attached to machine part for better heat dissipation
Intensity Controller Selection	SD, ST, ANG, LC, SDA, SDP series
CE Conformity	YES
RoHS Compliance	YES

Application	
Illumination Type	Backlight Illumination
Application Use	Lead frame inspection, shape recognition, size measurement

ILLUMINATOR DATA

LT3PVZL80X400-00-X-G-24V

Lighting Pattern				
Working Distance	For further details please contact us.			
Display and Image				
Data Results	Horizontal	Meas.(mm)	Vertical	Meas.(mm)
	90%		90%	
	80%		80%	
	70%		70%	
	60%		60%	
	50%		50%	
	40%		40%	
	30%		30%	
	20%		20%	
	10%		10%	