


ILLUMINATOR DATA

LTZPFL120-00-3-W-24V

Lighting Dimension

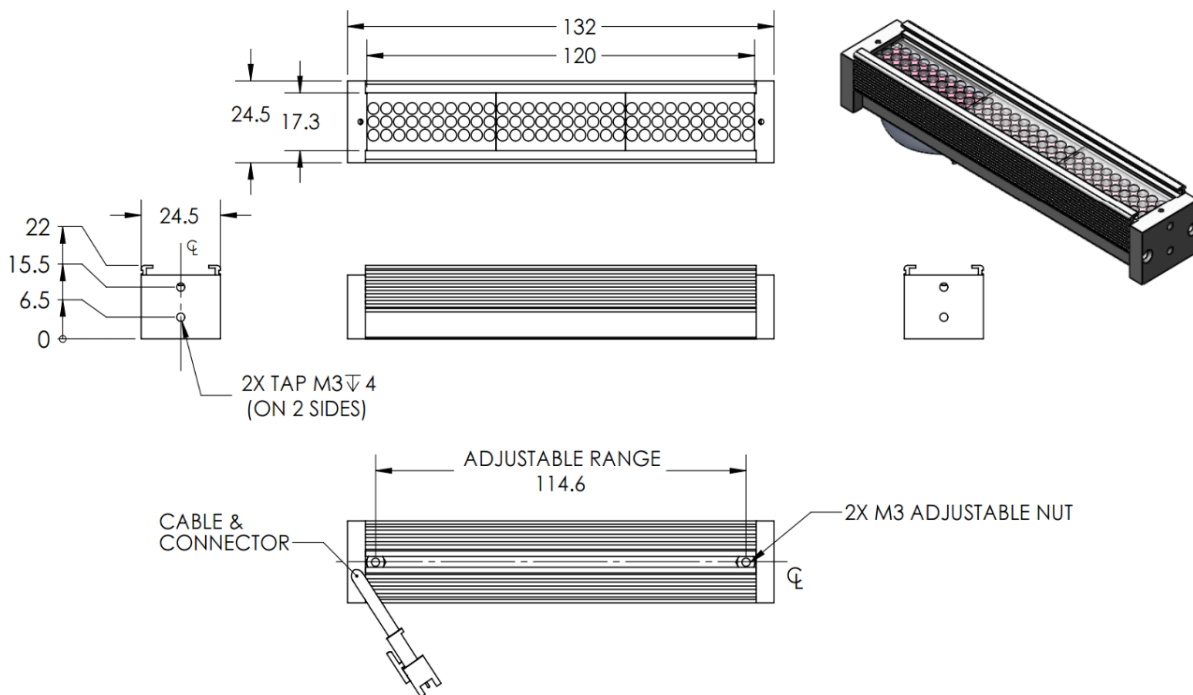

Mechanical Information

Casing Material	Aluminium
Storage Temperature Range	0 - 45°C
Storage Humidity Range	20 - 85%
Weight	95g
Length / Outer Diameter	132mm
Width / Inner Diameter	24.5mm
Thickness / Height	22mm

ILLUMINATOR DATA

LTZPFL120-00-3-W-24V

Lighting Information																										
Part Number	LTZPFL120-00-3-W-24V																									
LED Color	WHITE																									
Wavelength	REFER TO CHROMACITY TABLE																									
Working Distance	80 mm	90 mm		100 mm																						
Intensity (±15%)	12800 lx	11600 lx		10200 lx																						
Illumination (number of row)	3																									
Illumination Active Area	Active Length / Outer Dia.			120 mm																						
	Active Width / Inner Dia.			17.3 mm																						
Emission angle	0																									
Eye Safety Class (IEC62471)	EXEMPT																									
Chromaticity Table	<table><tr><td>X</td><td>0.296</td><td>0.287</td><td>0.307</td><td>0.311</td></tr><tr><td>Y</td><td>0.276</td><td>0.295</td><td>0.315</td><td>0.294</td></tr></table>			X	0.296	0.287	0.307	0.311	Y	0.276	0.295	0.315	0.294	<table><tr><td>X</td><td>0.311</td><td>0.307</td><td>0.33</td><td>0.33</td></tr><tr><td>Y</td><td>0.294</td><td>0.315</td><td>0.339</td><td>0.318</td></tr></table>			X	0.311	0.307	0.33	0.33	Y	0.294	0.315	0.339	0.318
X	0.296	0.287	0.307	0.311																						
Y	0.276	0.295	0.315	0.294																						
X	0.311	0.307	0.33	0.33																						
Y	0.294	0.315	0.339	0.318																						
For White colour only																										

Electrical Information	
Rated Constant Voltage	24V±2%
Rated Constant Current	126mA
Power Consumption	3.02W
Casing temperature, After 60 minutes operation	45.1 °C

Strobe Mode Specification	
*Normal Strobe Voltage	24 V
*Normal Strobe Current	126 mA
Overdrive Voltage Range	Min: 36V Max: 48V
Overdrive Current Range	Min: 0.25 A Max: 0.39 A
Recommended Overdrive Voltage	36V
**Max. Trigger Pulse Duration	10 msec
**Max. Duty Cycle	10%

*Normal strobe means the lighting is operated using the rated power. Overdrive means the power supplied to the lighting exceeded the rated power.

**Overdrive condition must not exceed the max. trigger pulse duration and max. duty cycle.

ILLUMINATOR DATA

LTZPFL120-00-3-W-24V

Connection Information			
Connector Type (Default)	JST SMR-03V		
Cable Length	50 cm		
Pin Configuration 	Pin	Signal	Cable Colour
	1	LED +	Red
	2	N.C	-
	3	LED -	White
			

Additional Information	
Additional Cooling Method	Attached to machine part for better heat dissipation
Intensity Controller Selection	SD, ST, ANG, LC, SDA, SDP series
CE Conformity	YES
RoHS Compliance	YES

Application	
Illumination Type	Direct Illumination
Application Use	Label Inspection, Character Inspection, Code Recognition

ILLUMINATOR DATA

LTZPFL120-00-3-W-24V

Lighting Pattern				
Working Distance	For further details please contact us.			
Display and Image				
Data Results	Horizontal	Meas.(mm)	Vertical	Meas.(mm)
	90%		90%	
	80%		80%	
	70%		70%	
	60%		60%	
	50%		50%	
	40%		40%	
	30%		30%	
	20%		20%	
	10%		10%	