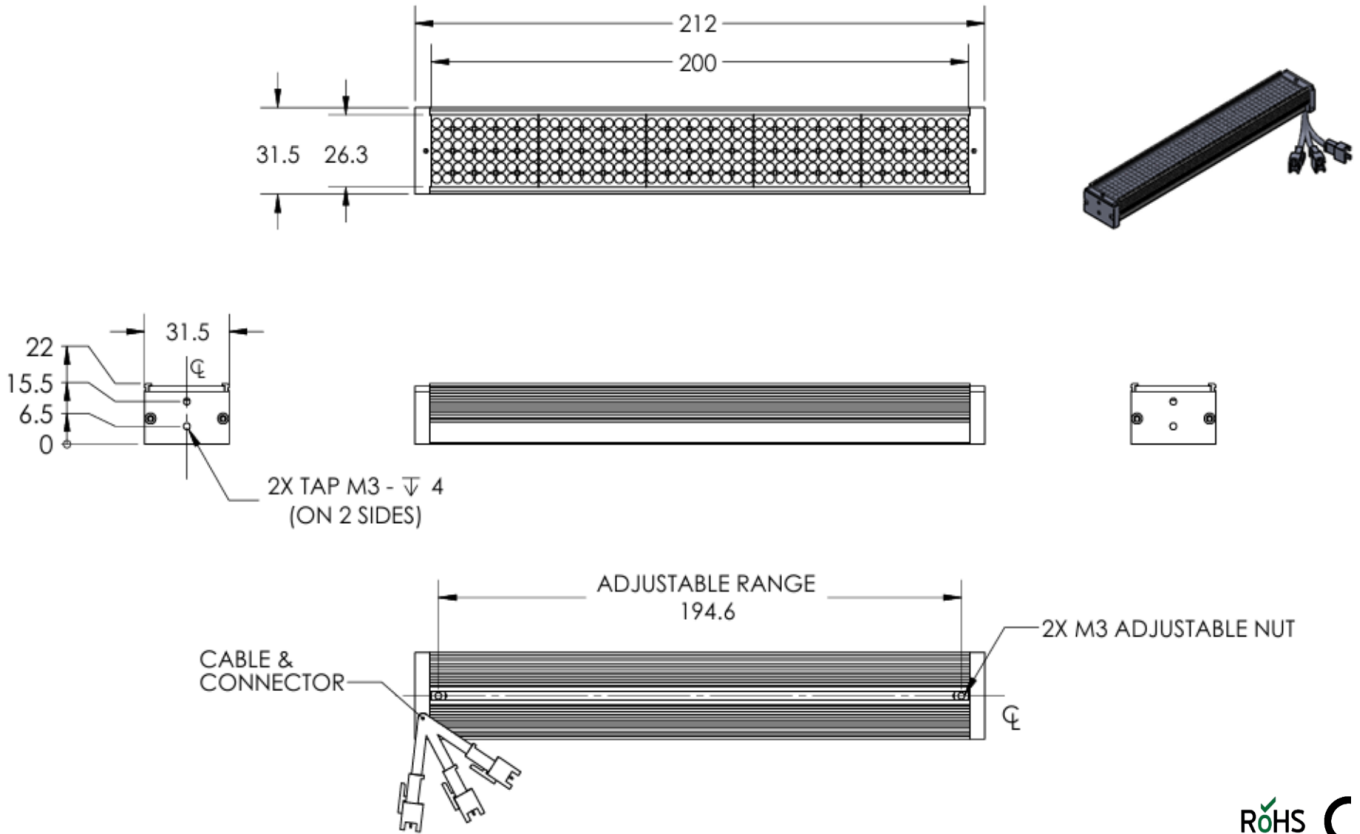


LTZPFL200-00-6-RGB-24V

Lighting Dimension

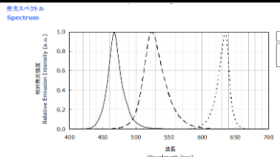
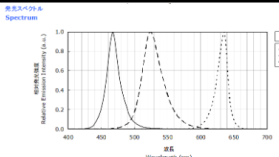
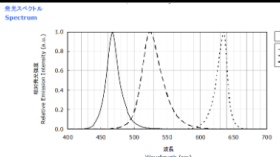
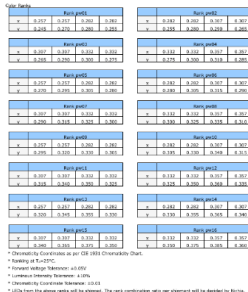
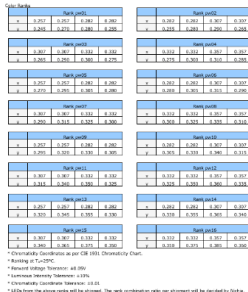
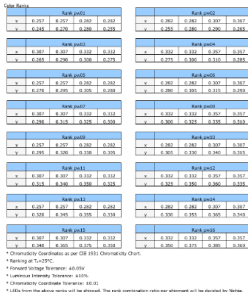


Mechanical Information

Casing Material	Aluminum Extrusion, Aluminium
Storage Temperature Range	0 - 45°C
Storage Humidity Range	20 - 85%
Weight	181g
Width / Inner Diameter	31.5mm
Length / Outer Diameter	212mm
Height / Thickness	22mm

ILLUMINATOR DATA

LTZPFL200-00-6-RGB-24V


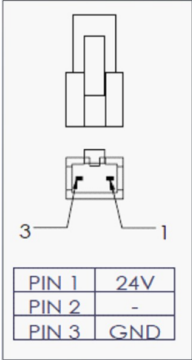
Lighting Information									
LED Color	RED			GREEN			BLUE		
Wavelength	 <p>635 nm</p>			 <p>525 nm</p>			 <p>465 nm</p>		
Working Distance	100mm	130mm	150mm	100mm	130mm	150mm	100mm	130mm	150mm
Intensity (±15%)	16080lx	14880lx	14520lx	24720lx	22680lx	20640lx	30240lx	26880lx	23880lx
Illumination (Number of Row)	6			6			6		
Illumination Active Area	Active Outer Diameter			200					
	Active Inner Diameter			26.3					
Emission Angle	0°			0°			0°		
Eye Safety Class (IEC62471)	EXEMPT			EXEMPT			EXEMPT		
	Products with sources, which do not pose any potential photobiological hazard even for the continuous and unrestricted exposure. Example: 8 hours of exposure poses no acute hazard to either eye or skin, and 10,000 seconds (2.8 hours) of the intent starting causes no blue light retinal hazard.			Products with sources, which do not pose any potential photobiological hazard even for the continuous and unrestricted exposure. Example: 8 hours of exposure poses no acute hazard to either eye or skin, and 10,000 seconds (2.8 hours) of the intent starting causes no blue light retinal hazard.			Products with sources, which do not pose any potential photobiological hazard even for the continuous and unrestricted exposure. Example: 8 hours of exposure poses no acute hazard to either eye or skin, and 10,000 seconds (2.8 hours) of the intent starting causes no blue light retinal hazard.		
Chromaticity Table For White Colour Only									

Electrical Information			
Rated Voltage	24V _(Min) - 24V _(Max)		
Rated Current	500mA	400mA	450mA
Power Consumption	12.000W	9.600W	10.800W
Casing Temperature, After 60 minutes operation	60°C		


Strobe Mode Specification						
*Normal Strobe Voltage	24V					
*Normal Strobe Current	500mA		400mA		450mA	
Overdrive Voltage Range	Min: 36V	Max: 48V	Min: 36V	Max: 48V	Min: 36V	Max: 48V
Overdrive Current Range	Min: 1000mA	Max: 1500mA	Min: 700mA	Max: 1165mA	Min: 725mA	Max: 1185mA
Recommended Overdrive Voltage	36V		36V		36V	
**Max. Trigger Pulse Duration	10%					
**Max. Duty Cycle	10msec					

ILLUMINATOR DATA

LTZPFL200-00-6-RGB-24V

Connection Information			
Connector Type	JST SMR-03V-B		
Cable Length	500mm		
Pin Configuration 	Pin	Signal	Cable Color
	1	24V	RED
	2	-	-
	3	GND	WHITE / BLACK
			

Additional Information	
Additional Cooling Method	Attached to machine part for better heat dissipation
Intensity Controller Selection	LTIC series
CE Conformity	YES
RoHS Compliance	YES

Application	
Illumination Type	Direct, Rectangular SMD Illumination (for short working distance)
Application Use	<ul style="list-style-type: none"> • General Illumination • Code Recognition • Character Inspection • Label Inspection 

ILLUMINATOR DATA

LTZPFL200-00-6-RGB-24V

Lighting Pattern				
Working Distance	For further details, please contact us			
Display and Image	For further details, please contact us			
Data Results	Horizontal	Meas. (mm)	Vertical	Meas. (mm)
	90%	N.A.	90%	N.A.
	90%	N.A.	90%	N.A.
	80%	N.A.	80%	N.A.
	70%	N.A.	70%	N.A.
	60%	N.A.	60%	N.A.
	50%	N.A.	50%	N.A.
	40%	N.A.	40%	N.A.
	30%	N.A.	30%	N.A.
	20%	N.A.	20%	N.A.
	10%	N.A.	10%	N.A.