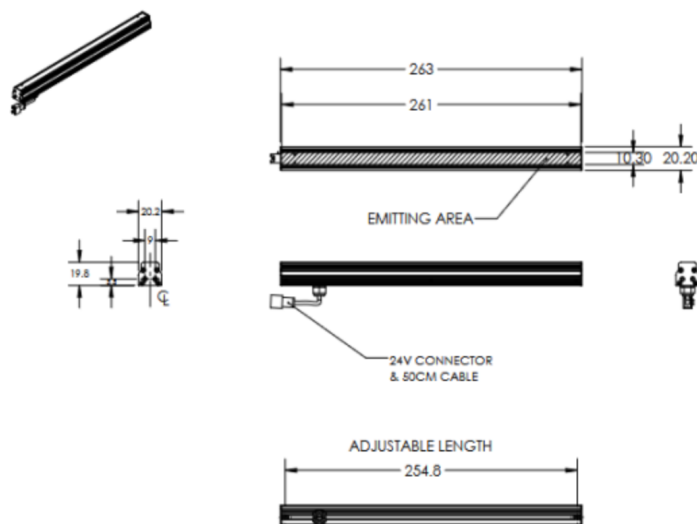


ILLUMINATOR DATA

LT2VZPG260-00-1-G-24V

Lighting Dimension

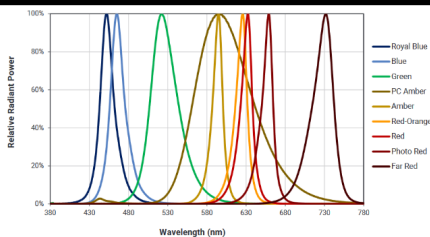


Mechanical Information

Casing Material	Extrusion
Storage Temperature Range	0 - 45°C
Storage Humidity Range	20 - 85%
Weight	-g
Width / Inner Diameter	263mm
Length / Outer Diameter	20.2mm
Height / Thickness	19.8mm

ILLUMINATOR DATA

LT2VZPG260-00-1-G-24V

Lighting Information			
LED Color	GREEN		
Wavelength	<div><p>520 nm - 535 nm</p></div>		
Working Distance	200mm	220mm	250mm
Intensity (±15%)	0lx	0lx	0lx
Illumination (Number of Row)	1		
Illumination Active Area	Active Outer Diameter	261	
	Active Inner Diameter	10.3	
Emission Angle	0°		
Eye Safety Class (IEC62471)	EXEMPT		
	Products with sources, which do not pose any potential photobiological hazard even for the continuous and unrestricted exposure. Example: 8 hours of exposure poses no acute hazard to either eye or skin, and 10,000 seconds (2.8 hours) of the intent starting causes no blue light retinal hazard.		
Chromaticity Table For White Colour Only			

Electrical Information	
Rated Voltage	24V _(Min) - 24V _(Max)
Rated Current	320mA
Power Consumption	7.680W
Casing Temperature, After 60 minutes operation	60°C



Strobe Mode Specification		
*Normal Strobe Voltage	24V	
*Normal Strobe Current	320mA	
Overdrive Voltage Range	Min: 36V	Max: 48V
Overdrive Current Range	Min: 1192mA	Max: 2192mA
Recommended Overdrive Voltage	36V	
**Max. Trigger Pulse Duration	10%	
**Max. Duty Cycle	10msec	

*Normal strobe means the lighting is operated using the rated power. Overdrive means the power supplied to the lighting exceeded the rated power.


**Overdrive condition must not exceed the max. trigger pulse duration and max. duty cycle.

ILLUMINATOR DATA

LT2VZPG260-00-1-G-24V

Connection Information									
Connector Type	JST SMR-03V-B								
Cable Length	500mm								
Pin Configuration	Pin	Signal	Cable Color						
	1	24V	RED						
	2	-	-						
	3	GND	WHITE / BLACK						
	<div><table><tr><td>PIN 1</td><td>24V</td></tr><tr><td>PIN 2</td><td>-</td></tr><tr><td>PIN 3</td><td>GND</td></tr></table></div>			PIN 1	24V	PIN 2	-	PIN 3	GND
				PIN 1	24V				
PIN 2	-								
PIN 3	GND								

Additional Information	
Additional Cooling Method	Attached to machine part for better heat dissipation
Intensity Controller Selection	LTIC series
CE Conformity	YES
RoHS Compliance	YES

Application	
Illumination Type	Direct Illumination - Bar Series
Application Use	<ul style="list-style-type: none"> Label Inspection Character Inspection Code Recognition 

ILLUMINATOR DATA

LT2VZPG260-00-1-G-24V

Lighting Pattern				
Working Distance	For further details, please contact us			
Display and Image	For further details, please contact us			
Data Results	Horizontal	Meas. (mm)	Vertical	Meas. (mm)
	90%	N.A.	90%	N.A.
	90%	N.A.	90%	N.A.
	80%	N.A.	80%	N.A.
	70%	N.A.	70%	N.A.
	60%	N.A.	60%	N.A.
	50%	N.A.	50%	N.A.
	40%	N.A.	40%	N.A.
	30%	N.A.	30%	N.A.
	20%	N.A.	20%	N.A.
	10%	N.A.	10%	N.A.