
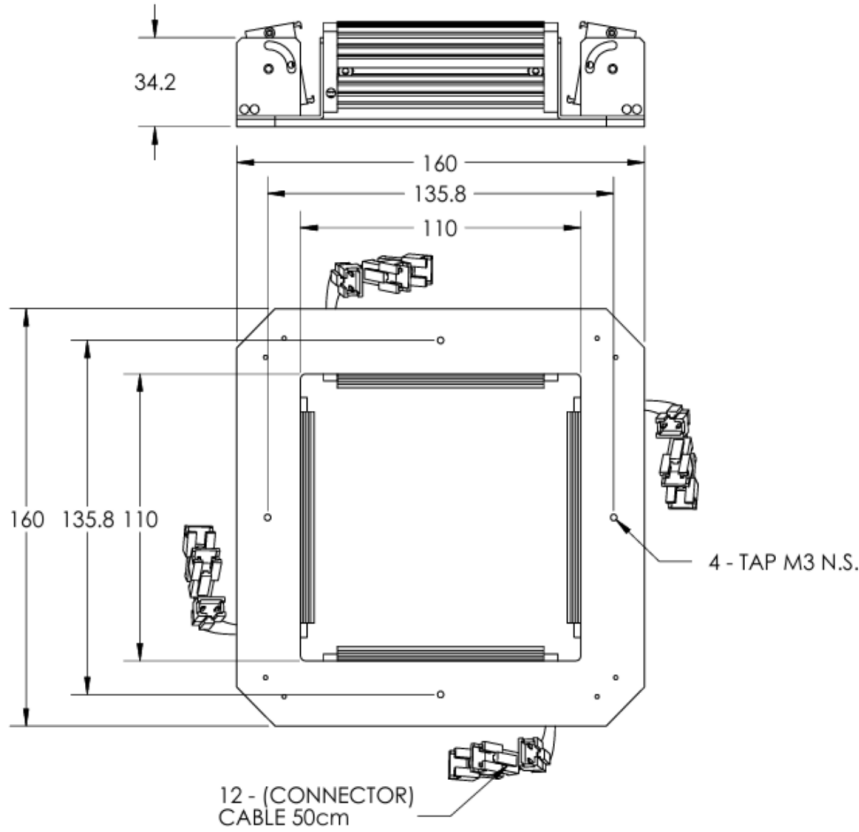


LTZPFE080-00-6-RGB-24V

Lighting Dimension

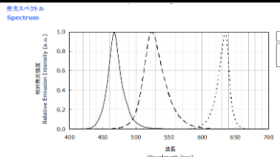
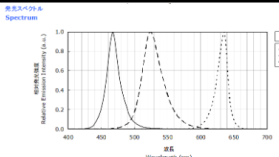
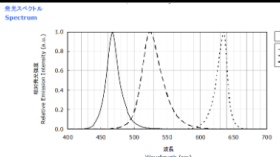
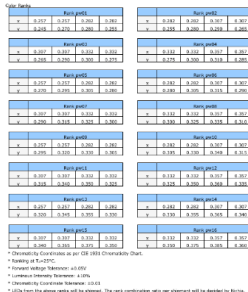
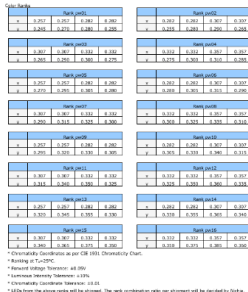
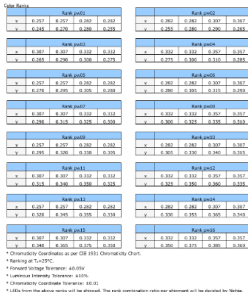


Mechanical Information

Casing Material	Aluminium, Aluminum Extrusion
Storage Temperature Range	0 - 45°C
Storage Humidity Range	20 - 85%
Weight	500g
Width / Inner Diameter	160mm
Length / Outer Diameter	160mm
Height / Thickness	34.2mm

ILLUMINATOR DATA

LTZPFE080-00-6-RGB-24V

Lighting Information									
LED Color	RED			GREEN			BLUE		
Wavelength	 <p>635 nm</p>			 <p>525 nm</p>			 <p>465 nm</p>		
Working Distance	192mm	203mm	214mm	192mm	203mm	214mm	192mm	203mm	214mm
Intensity (±15%)	0lx	0lx	0lx	0lx	0lx	0lx	0lx	0lx	0lx
Illumination (Number of Row)	6			6			6		
Illumination Active Area	Active Outer Diameter			160					
	Active Inner Diameter			110					
Emission Angle	0°			0°			0°		
Eye Safety Class (IEC62471)	EXEMPT			EXEMPT			EXEMPT		
	Products with sources, which do not pose any potential photobiological hazard even for the continuous and unrestricted exposure. Example: 8 hours of exposure poses no acute hazard to either eye or skin, and 10,000 seconds (2.8 hours) of the intent starting causes no blue light retinal hazard.			Products with sources, which do not pose any potential photobiological hazard even for the continuous and unrestricted exposure. Example: 8 hours of exposure poses no acute hazard to either eye or skin, and 10,000 seconds (2.8 hours) of the intent starting causes no blue light retinal hazard.			Products with sources, which do not pose any potential photobiological hazard even for the continuous and unrestricted exposure. Example: 8 hours of exposure poses no acute hazard to either eye or skin, and 10,000 seconds (2.8 hours) of the intent starting causes no blue light retinal hazard.		
Chromaticity Table For White Colour Only									

Electrical Information			
Rated Voltage	24V _(Min) - 24V _(Max)		
Rated Current	800mA	640mA	720mA
Power Consumption	19.200W	15.360W	17.280W
Casing Temperature, After 60 minutes operation	60°C		

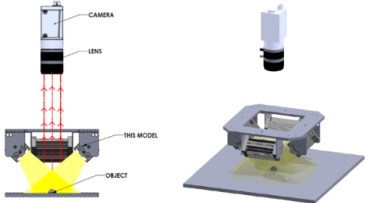
Strobe Mode Specification						
*Normal Strobe Voltage	24V					
*Normal Strobe Current	800mA		640mA		720mA	
Overdrive Voltage Range	Min: 36V	Max: 48V	Min: 36V	Max: 48V	Min: 36V	Max: 48V
Overdrive Current Range	Min: 1600mA	Max: 2400mA	Min: 1880mA	Max: 3120mA	Min: 1960mA	Max: 3200mA
Recommended Overdrive Voltage	36V		36V		36V	
**Max. Trigger Pulse Duration	10%					
**Max. Duty Cycle	10msec					

ILLUMINATOR DATA

LTZPFE080-00-6-RGB-24V

Connection Information			
Connector Type	JST SMR-03V-B		
Cable Length	500mm		
Pin Configuration 	Pin	Signal	Cable Color
	1	24V	RED
	2	-	-
	3	GND	WHITE / BLACK
			

Additional Information	
Additional Cooling Method	Attached to machine part for better heat dissipation
Intensity Controller Selection	LTIC series
CE Conformity	YES
RoHS Compliance	YES

Application	
Illumination Type	Direct, High Intensity, Multiple Rectangular Illumination (for short working distance)
Application Use	<ul style="list-style-type: none"> • Lead Inspection • Code Recognition • Character Inspection 

ILLUMINATOR DATA

LTZPFE080-00-6-RGB-24V

Lighting Pattern				
Working Distance	For further details, please contact us			
Display and Image	For further details, please contact us			
Data Results	Horizontal	Meas. (mm)	Vertical	Meas. (mm)
	90%	N.A.	90%	N.A.
	90%	N.A.	90%	N.A.
	80%	N.A.	80%	N.A.
	70%	N.A.	70%	N.A.
	60%	N.A.	60%	N.A.
	50%	N.A.	50%	N.A.
	40%	N.A.	40%	N.A.
	30%	N.A.	30%	N.A.
	20%	N.A.	20%	N.A.
	10%	N.A.	10%	N.A.