

**Space-saving telecentric illuminator for LARGE FOV systems, beam dimension 265 x 200 mm, green**



## SPECIFICATIONS

### Lighting specifications

Beam dimension <sup>1</sup>	(mm)	265 x 200
Working distance	(mm)	270 - 500
Light color, peak wavelength <sup>2</sup>		green, 525 nm
Spectral FWHM	(nm)	40

### Electrical specifications

Supply voltage <sup>3</sup>	(V)	12-24
Max power consumption	(W)	2.5
Led forward voltage typical (max) <sup>4</sup>	(V)	3.3 (4.0)
Max led forward current <sup>5</sup>	(mA)	350
Max pulse current <sup>6</sup>	(mA)	2000
Connector		M8
Included cable		CB244P1500

### Mechanical specifications

A <sup>7</sup>	(mm)	480.0
B <sup>7</sup>	(mm)	397.0
C <sup>7</sup>	(mm)	435.0
Mass	(g)	12354

## KEY ADVANTAGES

### Large illumination area in a super compact form factor

LTCLHP CORE PLUS are up to 40% shorter than other telecentric lights on the market.

### Reduce the size of your vision system

The working distance of LTCLHP CORE PLUS telecentric illuminators has been optimized to reduce the overall system's footprint.

### Boost your measurement system's performance

LTCLHP CORE PLUS illuminators may be used in place of flat backlights to improve your system's performance.

### Smart integration

LTCLHP CORE PLUS illuminators integrate a mounting flange for easy integration without additional clamps.

### System compactness is a competitive advantage

A smaller vision system or measurement machine is preferred by the industry.

**LTCLHP CORE PLUS** telecentric illuminators are designed to illuminate large areas in a reduced space. They are up to 40% shorter than other telecentric lights on the market.

### Environment

Operating temperature	(°C)	0-40
Storage temperature	(°C)	0-50
Operating relative humidity	(%)	20-85, non condensing
Installation		Indoor use only

### Eye safety

Risk group (CEI EN 62471:2010)	Risk group 1
--------------------------------	--------------

<sup>1</sup> Beam shape is not circular

<sup>2</sup> Opto Engineering recommends green light for high precision measurements application

<sup>3</sup> Tolerance  $\pm 10\%$


<sup>4</sup> At max forward current. Tolerance is  $\pm 0.06V$  on forward voltage measurements

<sup>5</sup> In continuous mode (not pulsed)

<sup>6</sup> At pulse with  $\leq 10ms$  and duty cycle  $\leq 10\%$ . Built in electronics board must be bypassed.

<sup>7</sup> Nominal value, with no spacers in place.

## M8 CONNECTOR PINOUT



Pin	Function	Cable color
1	Earth	Yellow/Green
2	Ground	Black
3	Anode	Blue
4	Power supply (+12/24 V)	Brown


## COMPATIBLE PRODUCTS

Full list of compatible products available [here](#).




A wide selection of innovative machine vision components.


## LTCLHP CORE PLUS illuminator dimensions (A, B, C)



A, B and C indicate the mechanical dimensions of the illuminator.

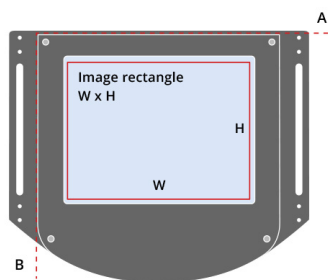


The width of the beam rectangle is aligned along the A axis. The height of the beam rectangle is aligned along the B axis.

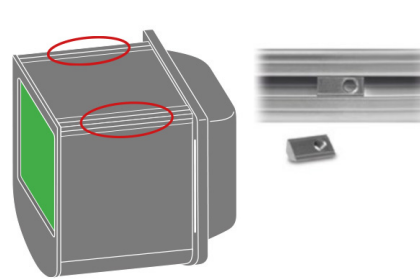

Integrated extruded aluminum profiles with M5 T-slot nuts allow for easy and cost-effective mounting.

## LED color spectrum

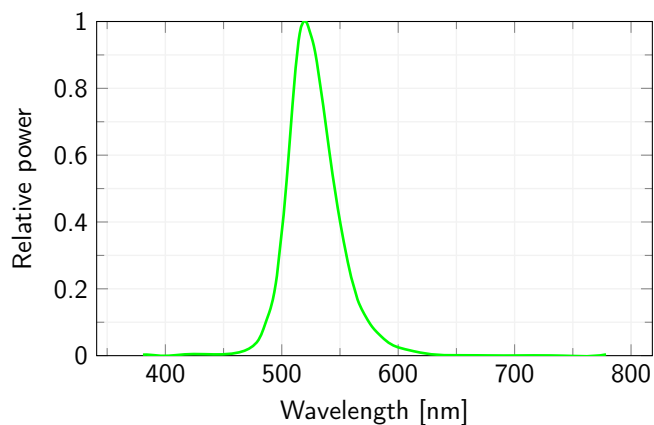

## Forward Current Characteristics

