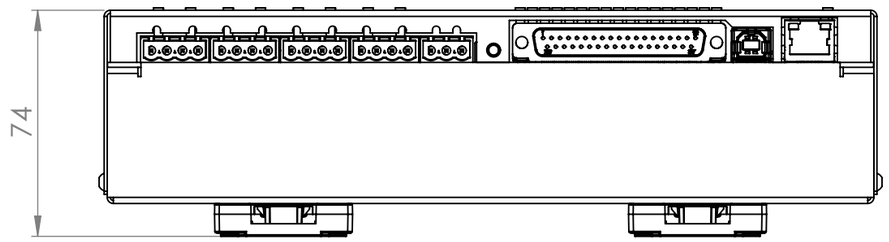


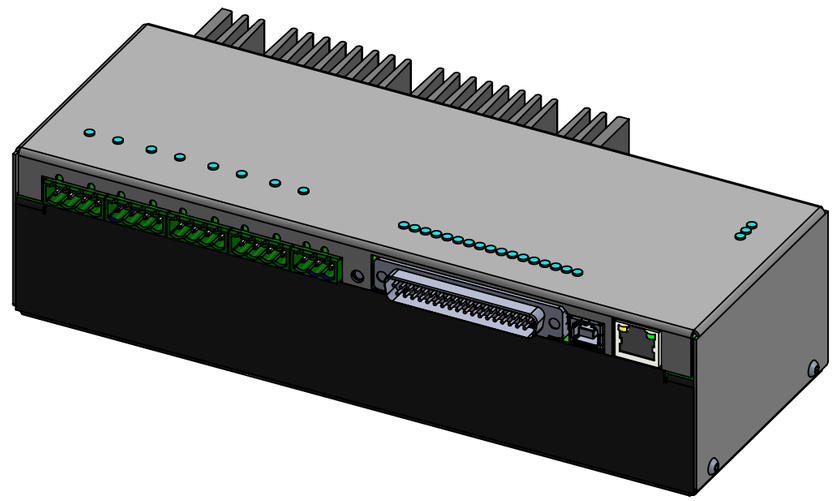

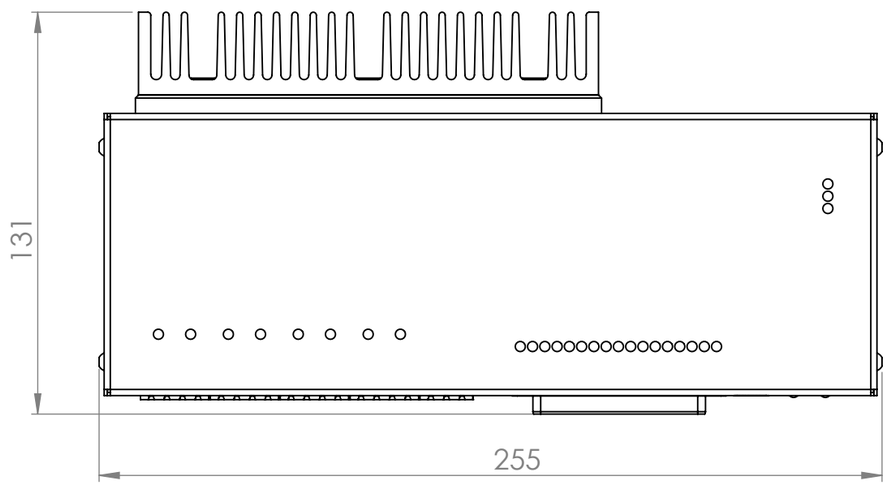


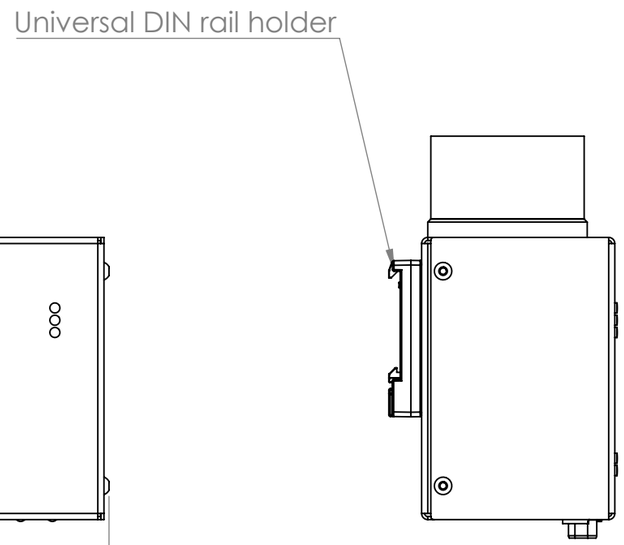


| | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| Material | | | | | | | | | |
| Surface treatment | | | | | | | | | |
| Geometrical tolerance (ISO 2768-2) | | | | | | | Class | K | Undimensioned bevels 0.5x45° |
| Linear tolerance (ISO 2768-2) | | | | | | | Class | m | |
| 0.5 ÷3 | >3÷ 6 | >6÷ 30 | >30÷ 120 | >120 ÷400 | >400÷ 1000 | >1000 ÷2000 | >2000 ÷4000 | Undimensioned radii R 0.5 | |
| ±0.1 | ±0.1 | ±0.2 | ±0.3 | ±0.5 | ±0.8 | ±1.2 | ±2 | All dimensions are in [mm] | |

| | Date | Name |
|---|---|---|
| Designed | | |
| Drawn | 26/11/2018 | R. Vavassori |
| Approved | - | S. Sigala |

OPTO ENGINEERING

OPTO ENGINEERING S.r.l. - Mantova, ITALY - Tel. +39 0376 699111 - www.opto-engineering.com

| | |
|---|---|
| Mass | Scale 1:2 |
| Part No. | |
| Description (EN) | - |
| Descrizione (IT) | Assieme LTDVE8CH-20 |
| Drawing No. | Sheet 1 of 1 |

*Proprietary and confidential. All rights reserved. No copy, dissemitation or circulation is allowed unless specifically authorized in writing by OPTO ENGINEERING S.r.l. Any violation could be legally persecuted.*