

### Ring LED illuminator, inner diameter 37.7mm, straight type, white, 6300 K



#### SPECIFICATIONS

##### Lighting specifications

Illumination area outer diameter	(mm)	107.0
Illumination area inner diameter	(mm)	57.0
Optimal working distance (min-max)	(mm)	85-150
Number of LED rows		1
Emission angle	(°)	0
Light color, peak wavelength		white, 6300 K
Illuminance at min WD <sup>1</sup>	(lux)	17500
Illuminance at max WD <sup>1</sup>	(lux)	7540

##### Electrical specifications

Supply voltage <sup>2</sup>	(V)	24
Current	(mA)	650
Power consumption	(W)	15.6
Estimated MTBF <sup>3</sup>	(hours)	> 20000
Max pulse voltage <sup>4</sup>	(V)	24-48 (36 recommended)
Max pulse current <sup>5</sup>	(mA)	1950
Max duty cycle	(%)	10
Max pulse duration	(ms)	10
Connector <sup>6</sup>		Flying leads
Cable length	(mm)	1000

##### Mechanical specifications

Outer diameter	(mm)	120.6
Inner diameter	(mm)	37.7
Height	(mm)	39.6
Mass	(g)	371

#### KEY ADVANTAGES

##### Mechanically fitting Opto Engineering® optics

Each lens integrates specific mechanical interfaces.

##### Specific illumination geometry

Illumination path matches Opto Engineering lenses viewing angle and numerical aperture.

##### High performance to price ratio

Cost-effective, without quality compromises.

**LTRNST series** are LED ring illuminators specifically designed for a wide range of Opto Engineering products. Especially the stray type models perfectly fit Opto Engineering® telecentric lenses.

#### Environment

Operating temperature	(°C)	0-35
Operating humidity	(%)	20-85, non condensing

#### Eye safety

Risk group (CEI EN 62471:2010)	Exempt
--------------------------------	--------

<sup>1</sup> ±15%.

<sup>2</sup> Tolerance ±2%.


<sup>3</sup> At 25°C.

<sup>4</sup> Constant voltage power supply.

<sup>5</sup> Constant current power supply.

<sup>6</sup> Red Cable is V+, white cable is V-.

#### LED color spectrum

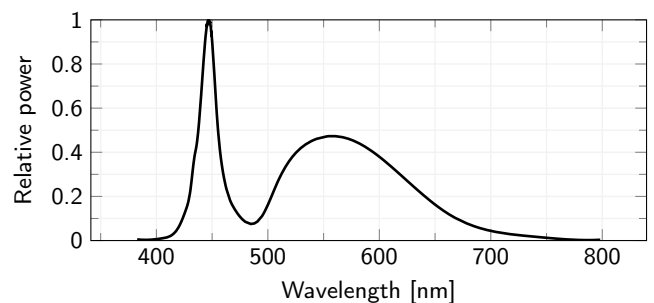

#### COMPATIBLE PRODUCTS

Full list of compatible products available [here](#).



A wide selection of innovative machine vision components.