

Ultra compact bi-telecentric lens for 2/3" detectors, magnification 0.044x, C mount



PATENTED

SPECIFICATIONS

Optical specifications

Magnification		0.044
Image rectangle ¹	(mm x mm)	8.93 x 7.45
Working distance ²	(mm)	328.0
wf/N ³		8
Telecentricity typical (max) ⁴	(°)	< 0.12 (0.18)
Distortion typical (max) ⁵	(%)	< 0.8
Residual Distortion ⁶	(%)	< 0.01
Field depth ⁷	(mm)	215.8
Resolution (max) ⁸	(μm)	116

Mechanical specifications

Mount		C
Phase adjustment ⁹		Yes
A ¹⁰	(mm)	410.4
B	(mm)	344.1
C	(mm)	359.0
Mass	(g)	8982

KEY ADVANTAGES

Large FOV in a super compact form factor

TC CORE PLUS telecentric lenses are up to 45% shorter than other telecentric lenses on the market. They are designed to image extremely large FOVs in a reduced space.

Optimized working distance

Working distance of TC CORE PLUS series has been reduced to greatly minimize system dimensions.

Smart integration

TC CORE PLUS lenses integrate a mounting flange for easy mounting without additional clamps.

System compactness is a competitive advantage

TC CORE PLUS lenses allow you to reduce the size of your vision system, resulting in less manufacturing, shipping and storage costs.

TC CORE PLUS series are large FOV telecentric lenses for area scan cameras, specifically designed for the latest generation 1/1.8" and 2/3" CMOS sensors. Their opto-mechanical design is ideal to measure large objects in a reduced space.

FIELD OF VIEW

Sensors	(mm x mm)
1/3" (4.8 x 3.6 mm x mm)	109.59 x 82.19
1/2.5" (5.70 x 4.28 mm x mm)	130.14 x 97.72
1/2" (6.4 x 4.8 mm x mm)	146.12 x 109.59
1/1.8" (7.13 x 5.33 mm x mm)	162.79 x 121.69
2/3" (8.50 x 7.09 mm x mm)	194.06 x 161.87

¹ Given the squared shape of the front window, the lens forms a rectangular image.

² Working distance: distance between the front end of the mechanics and the object. Set this distance within $\pm 5\%$ of the nominal value for maximum resolution and minimum distortion.

³ working f/N : the real f/N of a lens in operating conditions.

⁴ Maximum angle of chief rays and optical axis on the object side. Typical (average production) values and maximum (guaranteed) values are listed.

⁵ Percent deviation of the real image compared to an ideal, undistorted image. Typical (average production) values and maximum (guaranteed) values are listed.

⁶ Residual distortion after calibration with **TCLIB Suite** software library, using a **PTCP calibrations pattern** and a fully GenICam compliant camera.

⁷ At the borders of the field depth the image can be still used for measurement but, to get a very sharp image, only half of the nominal field depth should be considered. Pixel size used for calculation is 3.45 μm.

⁸ Object side, calculated with the Rayleigh criterion with $\lambda = 520$ nm

⁹ Indicates the availability of an integrated camera phase adjustment feature.

¹⁰ Maximum dimension of the clamping flange.

NOTICE ON PERFORMANCE

Due to its original design mainly conceived to reduce the length and weight of a telecentric lens, typically CORE PLUS optics show a thermal drift which is higher than in traditional telecentric optics, especially when the entire FOV is used for measurement. When used for measurement applications, thus, CORE PLUS optics might need to be thermally calibrated depending on the required precision and accuracy.


COMPATIBLE PRODUCTS

Full list of compatible products available [here](#).




A wide selection of innovative machine vision components.


TC CORE PLUS LENS DIMENSION (A, B, C) AND CORRECT SENSOR POSITION



The long side of the sensor has to be aligned along the A axis.




The width of the FOV (W) is aligned along the A axis. The height of the FOV (H) is aligned along the B axis.

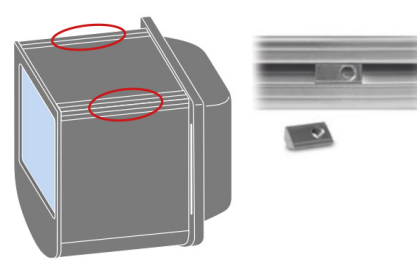

Built-in mounting flange and standard aluminum T-slot profiles. No additional mounting clamps required.




WARNING: Due to the special compact design, the absence of dust and its intrusion resistance are not guaranteed. We recommend that you use the product in a clean environment.

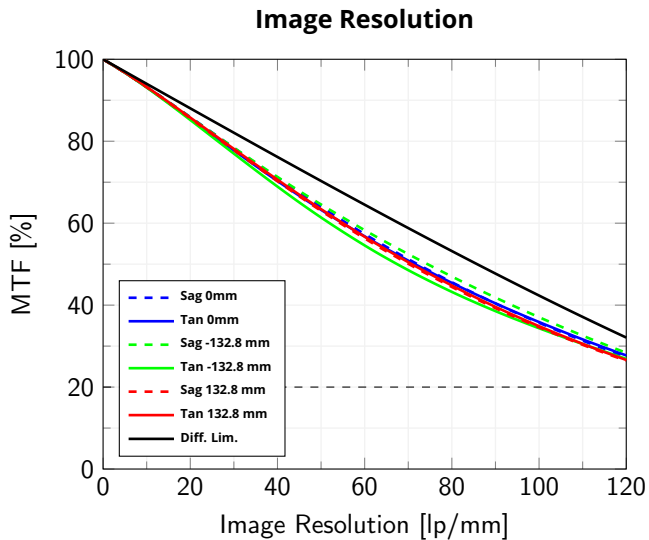


Modulation Transfer Function (MTF) vs. Image Resolution, wavelength range 486 nm - 656 nm

Red and green lines repress performance at the opposite corners of image rectangle

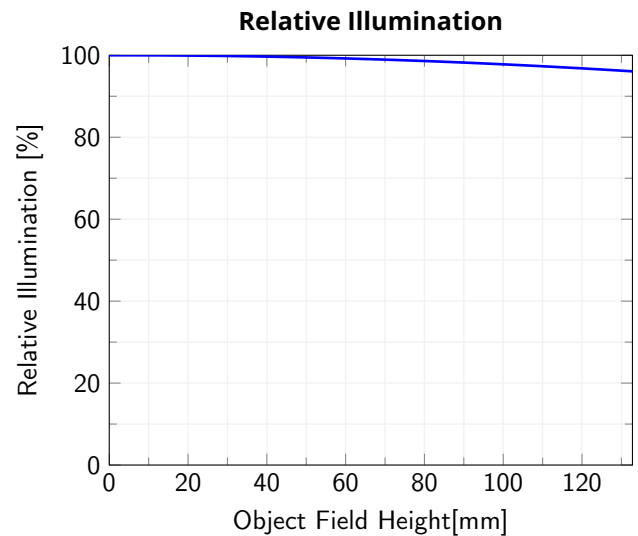

Relative illumination vs. Object Field Height, from the optical axis to the corner of the field of view

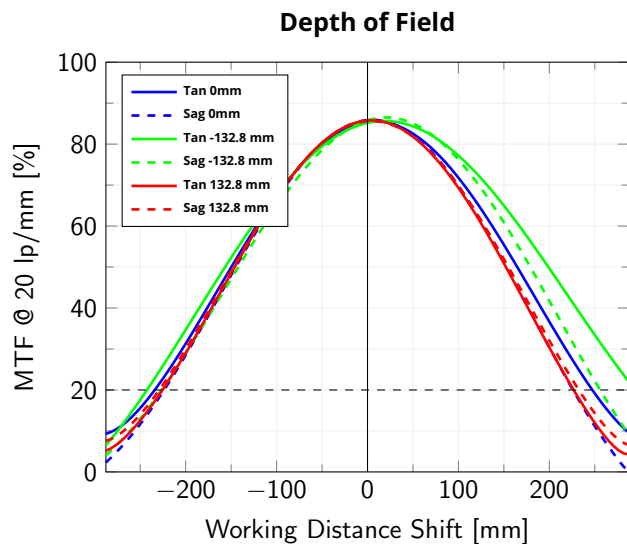

Modulation Transfer Function (MTF) @ 20 lp/mm vs. Working Distance Shift from the best focus Working Distance, wavelength range 486 nm - 656 nm

Red and green lines repress performance at the opposite corners of image rectangle