


产品技术规格书
(Product Technical Specification)

No.	名称 (Name)	规格 (Specification)		No.	名称 (Name)		规格 (Specification)		
1	型号(Model)	AZURE-2828MT		16	视场角 F.O.V(DxVxH)	° D H V	43mm	1	2/3
2	物料代码(Material Code)	3. A01. 0102828T1					73. 59	58. 45	41. 67
3	靶面格式(Image Format)	43mm					58. 88	46. 76	33. 34
4	焦距(Focal Length)	28mm					44. 16	35. 07	25. 00
5	后截距(Back Focus)	35. 71mm		17	接口(Mount)		T		
6	光圈(Iris Type)	Manual		18	适用物距 (Suitable Distance)		0. 3-∞m		
7	通光口径 (Lens Effective Diameter)	前面(Front)	φ 35. 6mm	19	最佳物距 (Optimum Working Distance)		30m		
		后面(Back)	φ 21. 04mm	20	镀膜(Coating)		400nm-950nm		
8	光学总长(TTL)	79mm		21	外形尺寸(Dimention)		φ 60×34. 17mm		
9	设计波长(Design Wavelength)	400~950nm		22	重量(Weight)		g		
10	最大主光线入射角 (CRA)	19. 64°		23	工作温度 (Operating Temperature)		-20℃~+60℃		
11	滤镜尺寸(Filter Thread)	M52×0. 75		24	镜头组成 (Lens Construction)		7-6		
12	F值(F/ No.)	2. 8	4	5. 6	8	11	16		
13	分辨率 (Resolution)	5MP	5MP	5MP	5MP	5MP	5MP		
14	畸变(Distortion)	<-2. 94%	<-2. 94%	<-2. 95%	<-2. 96%	<-2. 97	<-2. 97%		
15	相对照度 (Relative Illuminate)	33%	50%	69%	78%	78%	78%		

Size:

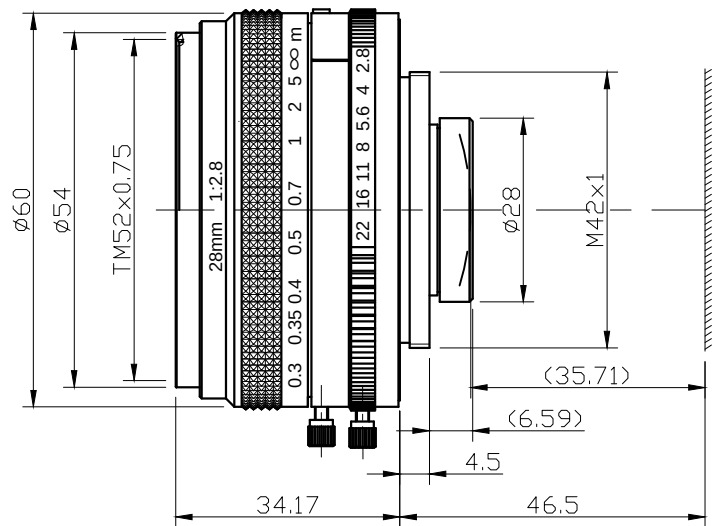

Unit:mm

Draw	Check	Recheck	Approval	福建浩蓝光电有限公司 AZURE Photonics Co.,Ltd