

LTRN024NW | DATASHEET

Ring LED illuminator, inner diameter 44.0mm, straight type, white, 6300 K



SPECIFICATIONS

Lighting specifications

Illumination area outer diameter	(mm)	107.0
Illumination area inner diameter	(mm)	57.0
Optimal working distance (min-max)	(mm)	85-150
Number of LED rows		1
Emission angle	(°)	0
Light color, peak wavelength		white, 6300 K
Illuminance at min WD ¹	(lux)	17500
Illuminance at max WD ¹	(lux)	7540

Electrical specifications

Supply voltage ²	(V)	24
Current	(mA)	650
Power consumption	(W)	15.6
Estimated MTBF ³	(hours)	> 20000
Max pulse voltage ⁴	(V)	24-48 (36 recommended)
Max pulse current ⁵	(mA)	1950
Max duty cycle	(%)	10
Max pulse duration	(ms)	10
Connector ⁶		Flying leads
Cable length	(mm)	1000

Mechanical specifications

Outer diameter	(mm)	120.6
Inner diameter	(mm)	44.0
Height	(mm)	39.6
Mass	(g)	371

KEY ADVANTAGES

Mechanically fitting Opto Engineering® optics

Each lens integrates specific mechanical interfaces.

Specific illumination geometry

Illumination path matches Opto Engineering lenses viewing angle and numerical aperture.

High performance to price ratio

Cost-effective, without quality compromises.

LTRNST series are LED ring illuminators specifically designed for a wide range of Opto Engineering products. Especially the stray type models perfectly fit Opto Engineering® telecentric lenses.

Environment

Operating temperature	(°C)	0-35
Operating humidity	(%)	20-85, non condensing

Eye safety

Risk group (CEI EN 62471:2010)	Exempt
--------------------------------	--------

¹ ±15%.

² Tolerance ±2%.


³ At 25°C.

⁴ Constant voltage power supply.

⁵ Constant current power supply.

⁶ Red Cable is V+, white cable is V-.

LED color spectrum

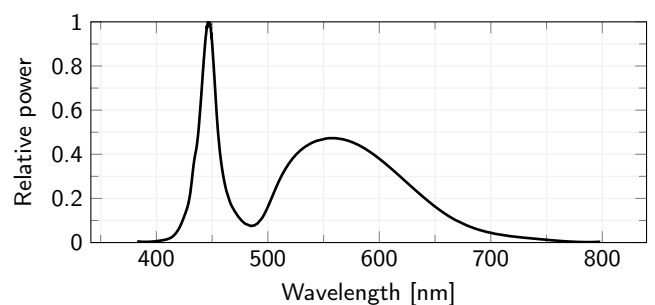

COMPATIBLE PRODUCTS

Full list of compatible products available [here](#).



A wide selection of innovative machine vision components.

All product specifications and data are subject to change without notice to improve reliability, functionality, design or other. Photos and pictures are for illustration purposes only. Data are reported by design, actual lens performance may vary due to manufacturing tolerances.